

# PAR38 15W E27 30D 2800K



Product Code:

**LR0915-75H30D-E27-2800K-230V**

### Electrical Data

Voltage (V)	220-240V
Frequency (Hz)	50/60
Constant Current (mA)	93
Power Factor	>0.5
Starting Time (sec)	<0.5
Warm-up Time Up to 100% of the Full Light Output (sec)	Instant full light


### Product Data

Lamp Base	E27
Product Wattage (W)	15
Equivalent Wattage (W)	75
Reflector	PAR38
Beam Angle ( ° )	30
Colour Temperature (K)	Warmwhite (2800K)
Colour Render Index (Ra)	Ra85
Colour Consistency (SDCM)	<6
Dimmable	No
Energy Label	A
Operating Temperature	-30 ° C to +40 ° C
Switching Cycles (times)	>1000000
Mercury Content (mg)	N/A
Weight (g)	458
Application	Retail, Residential

### Performance Data


Max. Luminous Intensity (cd)	2200
Total Luminous Flux (lm)	630
Luminous Flux in 90 ° cone (lm)	520
Rated Life (hrs)	30000
Lumen Maintenance at the End of Lamp Life (%)	90

### Product Dimensions

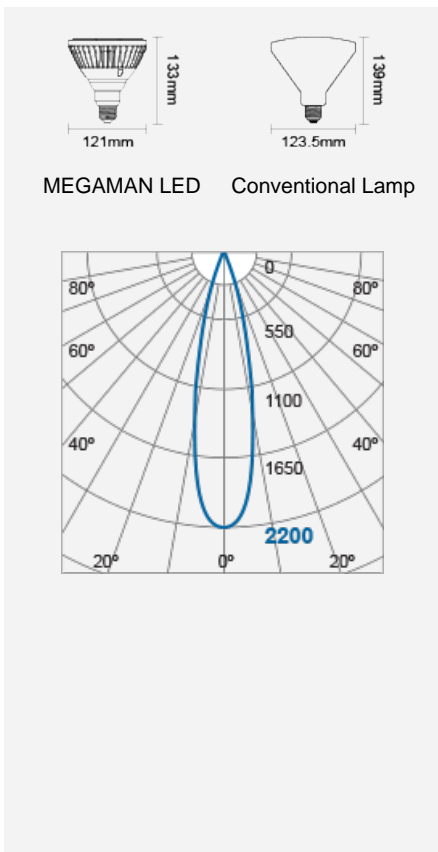

m	Lux	Ø cm
0.5	8800	27
1	2200	54
1.5	978	80
2	550	107

Beam angle = 30°



Diameter (mm)	121
Length (mm)	133
Remarks:	
The rated lamp life, rated luminous flux in 90 ° cone, total luminous flux, rated beam angle and rated wattage are equivalent to their nominal values shown on product packaging. There is no measurable output from 180nm to 380nm, so the chart shows only 380nm to 800nm.	